


# EV1004-EV1008TURBOX


Turbo HD DVR

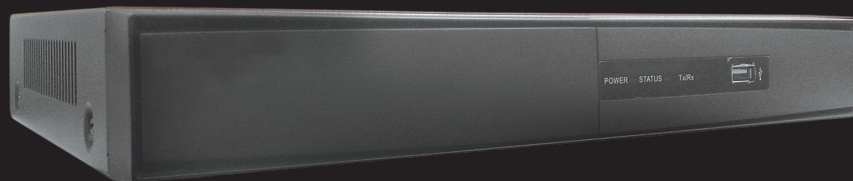

Modelo	EV1004TURBOX	EV1008TURBOX	
Video/Audio Input	Video Compression	H.264	
	Video input	4-ch	8-ch
		BNC interface (1.0Vp-p, 75 Ω), supporting coaxitron connection	
	Supported HDTV input	1080p/25Hz, 1080p/30Hz, 720p/25Hz, 720p/30Hz, 720P/50Hz, 720p/60Hz	
	Supported AHD input	720p/25Hz, 720p/30Hz	
	CVBS input	Support	
	IP video input	1-ch	2-ch
	Audio compression	G.711u	
Video/Audio output	Audio input/Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ)	
	CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480	
	HDMI/VGA Output	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
	Encoding Resolution	When 1080p Lite mode not enabled: 1080p(non-real-time)/720p/VGA/WD1/4CIF/CIF; When 1080p Lite mode enabled: 1080p lite/720p lite/720p/VGA/WD1/4CIF/CIF	
	Frame Rate	Main stream: 1/16 fps to Real time frame rate Sub-stream: WD1/4CIF@12fps, CIF/QVGA/QCIF@ real time frame rate	
	Video Bitrate	32 Kbps to 6 Mbps	
	Audio Output	1-ch, RCA (Linear, 1KΩ)	
	Audio Bit Rate	64 Kbps	
	Dual-Stream	Support	
	Stream Type	Video, Video & Audio	
Synchronous playback	4-ch	8-ch	
	Remote connections	128	
Network management	Network Protocols	TCP/IP, PPPoE, DHCP, EZVIZ Cloud P2P, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF	
Hard disk	SATA	1 SATA interface	
	Capacity	Up to 6TB capacity for each disk	
External interface	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the audio input)	
	Network interface	1; 10M/100Mbps self-adaptive Ethernet interface	
	USB port	2 × USB 2.0	
General	Serial interface	1; standard RS-485 serial interface, half-duplex	
	Power supply	12 VDC	
	Consumption (without HDD)	≤ 15 W	≤ 20 W
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)	
	Working humidity	10% to 90%	
	Chassis	Standalone 1U chassis	
	Dimensions (W × D × H)	315 × 242 × 45 mm (12.4 × 9.5 × 1.8 inch)	
Weight (without HDD)	≤ 2 kg (4.4lb)		

# EV1004-EV1008TURBOX

Turbo HD NVR

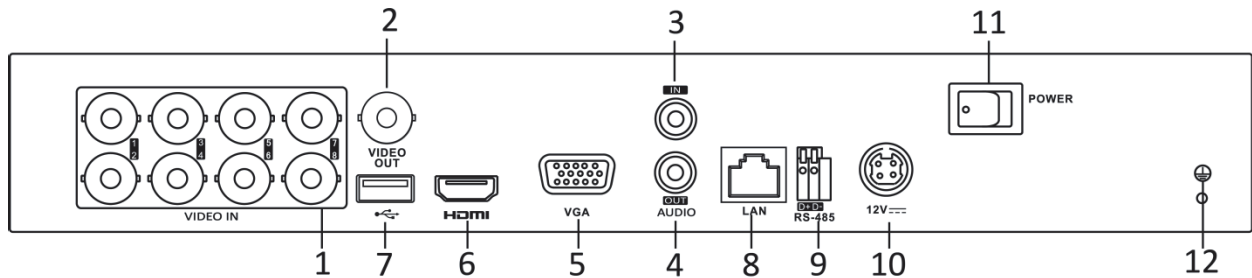

The rear panel of DS-7204HQHI-F1/N provides 4 video input interfaces

Index	Description
1	VIDEO IN
2	VIDEO OUT
3	AUDIO IN, RCA Connector
4	AUDIO OUT, RCA Connector
5	VGA Interface
6	HDMI Interface
7	USB Interface
8	LAN Network Interface

Index	Description
9	RS-485 Serial Interface
10	12VDC Power Input
11	Power Switch
12	GND